

# 555

RIGID

FOR HAND WRAPPING  
AND FOR  
WRAPPING MACHINES  
**WITHOUT** PRESTRETCH

## PREMIUM

Our sustainable solution to replace traditional standard films allowing **thickness downgauging** whilst maintaining the **stability** and the safety **of the load unit**.

The lower film consumption can  
**reduce your  
packaging costs by up to  
40%**



Fully  
recyclable



Easy and comfortable  
hand application



Safe  
transportation



40%  
cost saving



Protection  
of the goods




Reduction  
of CO<sub>2</sub> emissions

## PREMIUM FILM 555 RIGID ALLOWS 50% THICKNESS DOWNGAUGING COMPARED TO TRADITIONAL STANDARD FILMS




### TECHNICAL INFORMATION


555 RIGID maintains the same pallet stability  
as **your standard film**

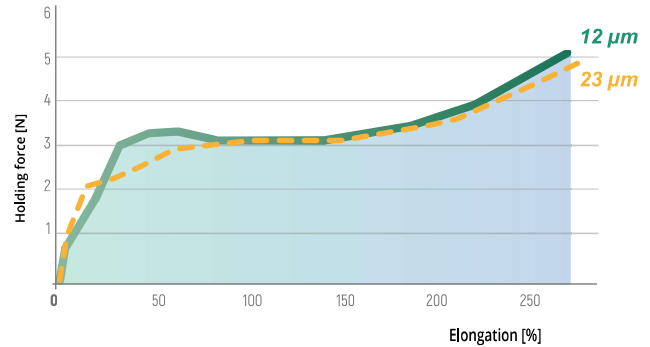

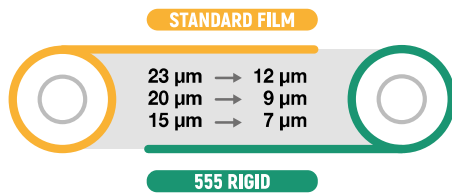

### SUGGESTIONS

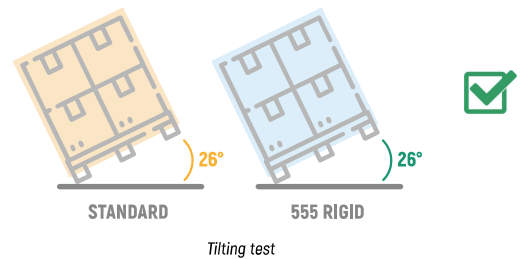

### THE LOAD UNIT IS IN COMPLIANCE WITH EN 12195 GUIDELINES



### CUSTOMER FIELD TEST – BUILDING MATERIALS

		PRODUCT	THICKNESS	NUMBER OF WRAPS	HOLDING FORCE	HOLDING FORCE DIFFERENCE	FILM CONSUMPTION	FILM SAVING
	Rotating table Stretch: 30%	STANDARD FILM	23 µm	11	15.3 kg		383 g	
	LOAD UNIT TYPE Profile "A", regular Weight: 650 kg	HIPAC 555	12 µm	11	15.7 kg	+ 3%	168 g	56%


### USAGE INFORMATION



Rotating table



Robot



Horizontal rotating ring



Hand wrapping