



FOR **HAND WRAPPING**
AND FOR
WRAPPING MACHINES
WITHOUT PRESTRETCH

PREMIUM

Gives the load unit excellent stability together with material saving and environmental protection.

999 is available in very low thickness (from 5 μm).




Fully recyclable



Easy and comfortable hand application



Safe transportation



Very low thickness



Protection of the goods




Reduction of CO₂ emissions

PREMIUM FILM 999 PRESTRETCHED IS IDEAL FOR PICKING IN LOGISTICS CENTRES




TECHNICAL INFORMATION

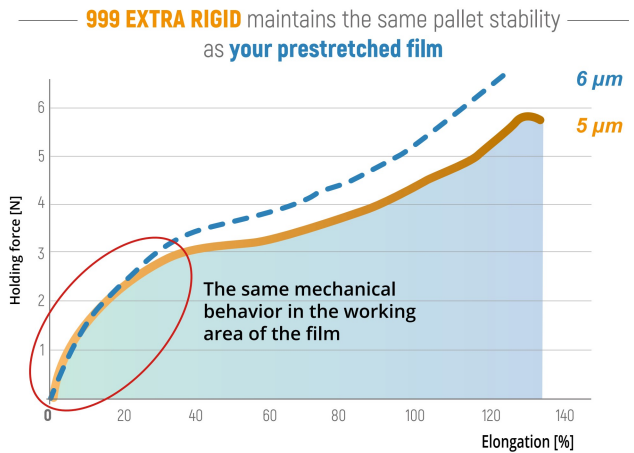


SUGGESTIONS

999 EXTRA RIGID

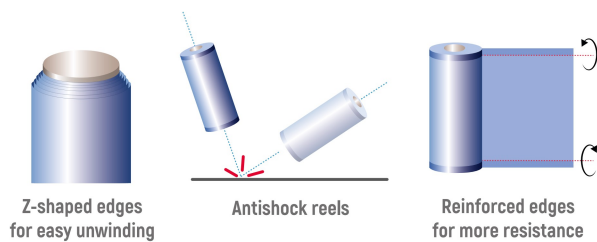


THE LOAD UNIT IS IN COMPLIANCE WITH EN 12195 GUIDELINES

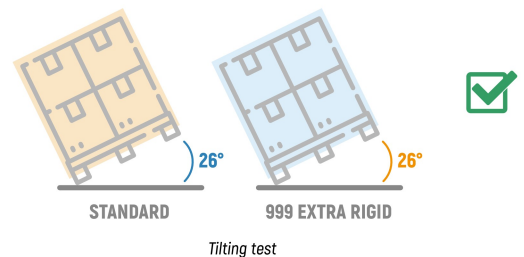

CUSTOMER FIELD TEST - PICKING

		PRODUCT	THICKNESS	NUMBER OF WRAPS	HOLDING FORCE	HOLDING FORCE DIFFERENCE	FILM CONSUMPTION	FILM SAVING
	Hand wrapping	PRE-STRETCHED	6 μm	12	9.00 kg		94 g	
	LOAD UNIT TYPE Profile "A", regular Weight: 400 kg	HIPAC 999	5 μm	12	8.9 kg	=	76 g	19%

USAGE INFORMATION



Rotating table



Robot



Hand wrapping